



SIAT

M. J. MAILLIS GROUP


SK2 / S26

Semi Automatic Carton Sealers

Bottom side application tape



Strong lifting structure

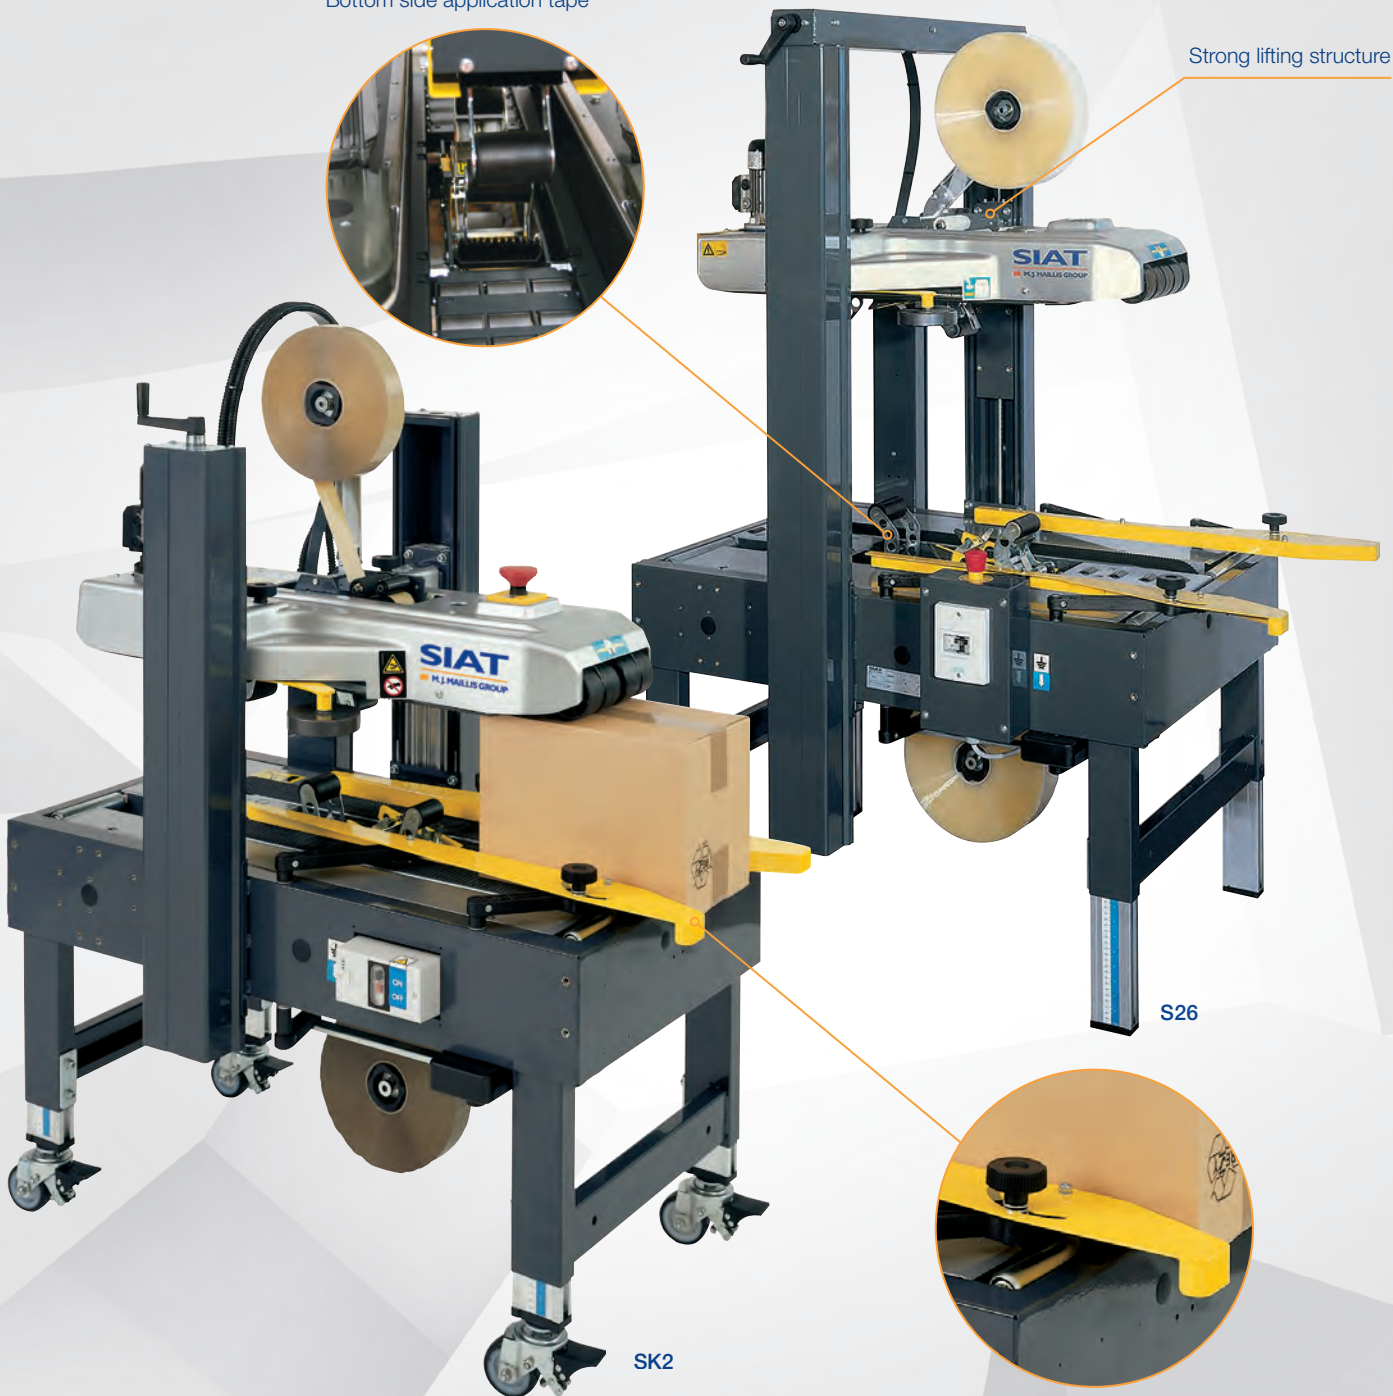

SK2

S26



for more details:



SK2




S26


SK2 and S26 are semi-automatic sealing machines with manual adjustment. Easy to use and simple to adjust, they enable to start the production in just minutes. Thanks to the top and bottom drive belts and the K11R or K12R taping units, they allow the perfect sealing of the box.

The machines have been designed in compliance with CE regulation.

> SK2

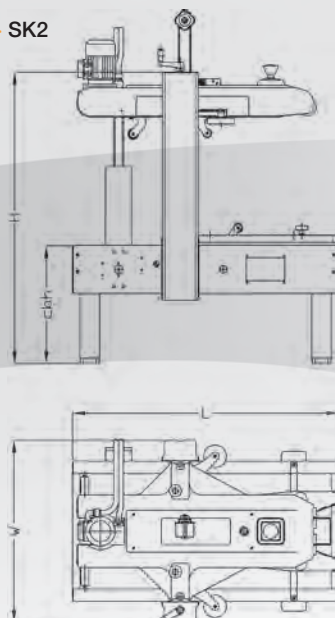

> S26

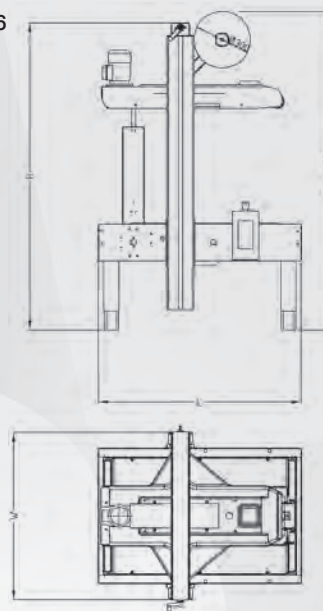

other languages: www.siat.com



> Machine dimensions

Dimensioni macchina
Machinemessungen
Dimensions machine
Dimensiones de máquina

Size / Weighth packaging			LxWxH
> SK2	160	175	114x78x115
> S26	185	220	133x110x175

> SK2


	Min.	Max
L	1080	-
W	740	-
H	1230	1570
cbh	480	820
AS 77	580	920
AS 80	680	1020

> S26

	Min.	Max
L	1080	-
W	890	-
H	1555	2125
cbh	480	820
AS 77	580	920
AS 80	680	1020


> Taping units

Unità nastranti
Verschliesseinheiten
Unités enrubanennes
Unidades de precinto



> Box dimensions

Dimensioni delle scatole
Kartonabmessungen
Dimensions des boîtes
Dimensiones de cajas



> SK2

	K11R std. / K12R on demand	
	Min.	Max
l	150	∞
w*	140 / 170	500
h	100	500

> S26


	K12R std. / K11R on demand	
	Min.	Max
l	150	∞
w*	170 / 140	650
h	100	950

	K11R/ K12R
	mm
A	410 Max
B	50 / 75
C	76

* With top side pressure rollers (minimum width manageable 180mm).
Upper guides required in case of width box less than 180mm (optional).

> Production capacity

Capacità di produzione
Produktionskapazität
Capacité de production
Capacidad de producción



> SK2

Max pcs.*	Bph	1200
-----------	-----	------


> S26

Max pcs.*	Bph	1200
-----------	-----	------

* Always based on shorter manageable box

> Standard voltage

Voltaggio standard
Standardspannung
Tension standard
Voltaje estándar



> SK2

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,08
Power kW	0,26
Phase	3Ph + PE

> S26

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,08
Power kW	0,26
Phase	3Ph + PE

> Optionals

Accessori
Zubehör
Accessories
Accesorios


> AS80

Higher legs
Set gambe più alte
Höhere Stützen
Pieds plus hauts
Patatas más altas



> AS77

Casters
Set ruote
Rädchen
Roulettes
Ruedas




> RG

Roller conveyor
Piani a rulli
Rollenbahnen
Plans à rouleaux
Rodillos libres



> GTL - GTR

Extendable conveyor
Rulliera estensibile
Ausziehbare rollenbahnen
Convoyeur extensible
Rodillos extensibles



> K-125 / K-250

Inkjet printer
Stampante ad inchiostro
Tintenstrahldrucker
Marqueur à jet d'encre
Impresora de inyección de tinta

